


Diany Saw Products Handbook

2021 / Version: 1.1


Bridge Saw Blades

Category	Code	Picture	Remarks	MOQ
Granite, Quartz	A1 Silent Granite		Quality Silent Blade Granite, Quartz, E.Stone Size: 300-800mm Segment: 10/15/20mm Arbor: 50/60mm	3pcs
	W2 Silent Granite		Premium Silent Blade Granite, Quartz, E.Stone Size: 300-800mm Segment: 10/15/20mm Arbor: 50/60mm	3pcs
	Wave Silent Granite		New Premium Silent Blade Granite, Quartz, E.Stone Size: 300-450mm Seg.: Turbo Wave 15mm Arbor: 50/60mm	3pcs
	HC Silent Granite		Standard Silent Blade Granite, Quartz, E.Stone Size: 300-800mm Segment: 10/15/20mm Arbor: 50/60mm	3pcs
	ARX Silent Granite		New ARIX Silent Blade Granite, Quartz, E.Stone Size: 250-600mm Seg.: ARIX 12mm Arbor: 50/60mm	3pcs
Marble	DL Silent Marble		Premium Silent Blade Marble Size: 300-600mm Segment: Flat 10mm Arbor: 50/60mm	3pcs


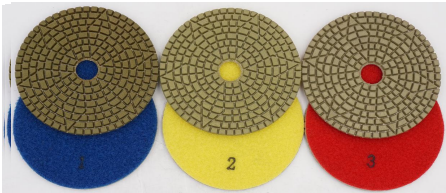
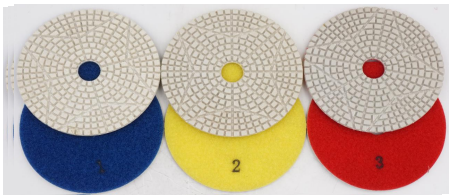
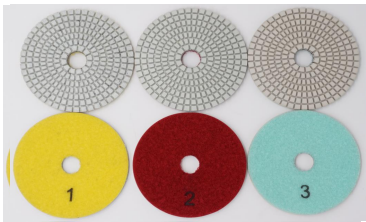
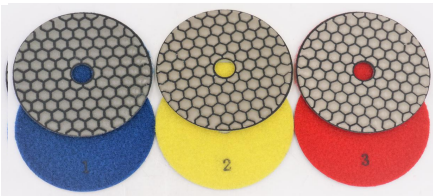

Bridge Saw Blades

Category	Code	Picture	Remarks	MOQ
Marble	DLY J-Slot Marble		Premium J-Slot Blade Marble, Ceramic Size: 300-400mm Segment: Flat 10mm Arbor: 50/60mm	3pcs
Engineered Stone	RZ Silent Eng. Stone		Premium Silent Blade Eng. Stone Size: 300-600mm Segment: 10/15/20mm Arbor: 50/60mm	3pcs
	RZY J-Slot Eng. Stone		Premium J-Slot Blade Eng. Stone Size: 300-400mm Segment: Flat 10mm Arbor: 50/60mm	3pcs
Ceramic, Porcelain	CZY J-Slot Ceramic		Premium J-Slot Blade Ceramic, Porcelain Size: 300-400mm Segment: Flat 10mm Arbor: 50/60mm	3pcs
Ultra Compact	UC Silent Ultra Compact		Premium Silent Blade Dekton, Neolith, Lapitec Size: 300-450mm Segment: Flat 10mm Arbor: 50/60mm	3pcs
	UCY J-Slot Ultra Compact		Premium J-Slot Blade Dekton, Neolith, Lapitec Size: 300-400mm Segment: Flat 10mm Arbor: 50/60mm	3pcs

Bridge Saw Blades

Category	Code	Picture	Remarks	MOQ
Concrete, Asphalt	LDS Laser Concrete Wirth Drop Segment		Laser Welded Dry Concete and Asphalt Blade Please contact with our salesman for more details	3pcs
Other Materials	Glass		J-Slot Blade Size: 300-400mm Segment: Flat 10mm Arbor: 50/60mm We have bond marix for each materials, please contact with our salesman for more details	3pcs
	Fiber Glass			
	Optical Glass			
	Quartz			
	Glazed Tile			
	Crystal Tile			
	Polished Tile			
	Jade			
Milling Wheels	M40 Silent Turbo Wave Segment		Silent Core Milling Wheel Narrow Slot	1pc
	M41 Silent Flat Segment		Silent Core Milling Wheel Wide Slot Size: 20/30/40mm	1pc




Polishing Pads

Category	Code	Picture	Remarks	MOQ
3 Steps				
3 Steps	STR 3-Steps Color Wet and Dry Pads		Size: 100mm Thickness: 3mm Step: 1,2,3	10pcs
	STR White Color		Size: 100mm Thickness: 3mm Step: 1,2,3	10pcs
	HEX 3-Steps Green Wet and Dry Pads		Size: 100mm Thickness: 3mm Step: 1,2,3	10pcs
	HEX White Color		Size: 100mm Thickness: 3mm Step: 1,2,3	10pcs
	HXJ 3 Steps Wet Pads		Size: 100mm Thickness: 3mm Step: 1,2,3	10pcs
	NEST 3-Steps Dry Pads		Size: 100mm Thickness: 2mm Step: 1,2,3	10pcs
	SFL 3 Steps Wet and Dry		Size: 80/100/125/150mm Thickness: 2.6/3mm Step: 1,2,3	10pcs





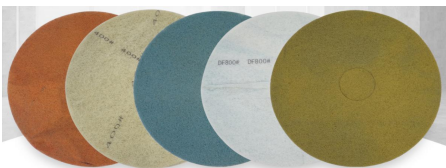
Polishing Pads

Category	Code	Picture	Remarks	MOQ
5 Steps				
5 Steps	FPS 5 Steps Green Wet and Dry Pads		Size: 100mm Thickness: 3mm Step: 1,2,3,4,5	10pcs
	FLW 3+1 Steps White Wet Pads		Size: 80/100/125/150mm Thickness: 2.6/3mm Step: 0,1,2,3	10pcs
	FAO 5+1 Steps Dry Pads		Size: 80/100/125/150mm Thickness: 2.6/3mm Step: 0,1,2,3,4,5	10pcs
	HMP Sponge Pads		Size: 100mm Grit: #500/1000/2000 /3000/6000	10pcs

Polishing Pads

Category	Code	Picture	Remarks	MOQ
7 Steps				
7 Steps	XWD 7 Steps Wet and Dry Pads		Size: 80/100/125/180mm Thickness: 3mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	BLC 7 Steps Wet Pads		Size: 80/100/125/150/180mm Thickness: 3mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	CUB 7 Steps Wet Pads		Size: 80/100/125/150/180mm Thickness: 3mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	SEA 7 Steps Wet Pads		Size: 80/100/125mm Thickness: 3mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	RAP 7 Steps Wet Pads		Size: 80/100/125mm Thickness: 3mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	DFS 7 Steps Wet Pads		Size: 80/100/125/150mm Thickness: 2.6/3mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	XHD 7 Steps Wet Pads		Size: 80/100/125/180mm Thickness: 3mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs


Polishing Pads

Category	Code	Picture	Remarks	MOQ
7 Steps	TRG 7 Steps Dry Pads		Size: 100mm Thickness: 2mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	MAZE 7 Steps Dry Pads		Size: 80/100/125mm Thickness: 2mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	HXG 7 Steps Dry Pads		Size: 80/100/125mm Thickness: 2mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
	BEE 7 Steps Dry Pads		Size: 80/100/125mm Thickness: 2mm Grit: #50, #100, #200 #400, #800, #1500, #3000	10pcs
Hand Pads	HPP Hand Pads		Size: 90*55mm Grit: #50, #100, #200 (Electroplated) #400, #800, #1500, #3000 (Resin)	5pcs
Concrete	CDP Concrete Floor Pads		Size: 100/125mm Thickness: 6mm Grit: #50, #100, #200 #400, #800, #1500, #3000	5pcs
	BFP Concrete Floor Renew		Size: 400mm Grit: #400#800#1500#3000	5pcs


Small Blades

Category	Code	Picture	Remarks	MOQ
Granite Quartz Engineered Stone Concrete	S1 GP Segmented		Size: 75-350mm Segment: 8/10/15mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S2 CR Continue		Size: 75-350mm Segment: 8/10mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S3 WT Continue Turbo		Size: 105-350mm Segment: 8mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S4 RF Turbo Wave		Size: 115-350mm Segment: 8mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S5 GU Continue Turbo With Production Teeth		Size: 115-350mm Segment: 8mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S6 FT Segmented With Production Teeth		Size: 115-350mm Segment: 8mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S7 BT Big T Segment		Size: 115/125/180mm Segment: 8mm Arbor: 22.2-20-15.8mm Flange: Available *4mm Thickness Available	10pcs



Small Blades

Category	Code	Picture	Remarks	MOQ
Granite Quartz Engineered Stone Concrete	S9 VTC Continuous T Segment Contour Blades		Size: 115/125/180mm Segment: 8mm Arbor: 22.2mm	10pcs
	S10 BTC Big T Segment Contour Blades		Size: 115/125/180mm Segment: 8mm Arbor: 22.2mm *4mm Thickness Available	10pcs
	S11 MG Segmented With Protection Teeth		Size: 105-350mm Segment: 8/10mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S12 AB Turbo Wave Continue Wide Turbo		Size: 115/125/180/230mm Segment: 8mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S13 BH Turbo With Core and Cooling Holes and Self Flange		Size: 105-350mm Segment: 8/12mm Arbor: 22.2-20-15.8mm Flange: Available Self-Flange:115/180/230mm	10pcs
	S14 BB Continue Turbo		Size: 105-350mm Segment: 8/10mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S15 BG Turbo Segment BG片		New Product Size: 125/180/230mm Segment: 12mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs

Small Blades

Category	Code	Picture	Remarks	MOQ
Granite Quartz Engineered Stone Concrete	S16 CB Continue Rim With Claw Production Teeth		New Product Size: 125/180/230mm Segment: 10mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S17 SP Turbo Segment With Cooling Holes and Self Flange		New Product Size: 300/350/400mm Segment: 15mm Arbor: 25.4/22.23/20mm Self Flange	10pcs
	S18 CTC Continue Turbo Rim Contour Blade		Segment: 105-230mm Segment: 8/10mm Arbor: 22.23mm	10pcs
	S20 MGC Continue MG Blade		Size: 125/150/180/230mm Segment: 10mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs
	S21 CTW Continue Rim With Cooling Holes and Self Flange		Size: 105-350mm Segment: 8/12mm Arbor: 22.2-20-15.8mm Flange: Available Self-Flange: 115/180/230mm	10pcs
	S22 ARX-1 Segmented With Pattern Technology		ARIX New Product Size: 105-230mm Segment: 8/10/12mm Arbor: 22.2-20-15.8mm Flange: Available	10pcs


Small Blades

Category	Code	Picture	Remarks	MOQ
GC Gringidng and Cutting Blades	GC1 Grinding and Cutting Blade		Size: 75/110/115/125/150/180/230 mm Flange: M14 or 5/8"-11	5pcs
	GC2 Grinding and Cutting Blade		Size: 115/125/150/180/230mm Flange: M14 or 5/8"-11	5pcs
	GC3 Grinding and Cutting Blade		Size: 115/125/150/180/230mm Flange: M14 or 5/8"-11	5pcs
	GC4 Grinding and Cutting Blade		Size: 125/230mm Flange: M14 or 5/8"-11	5pcs
Vacuum Brazed	VB1 SVE Segmented Vacuum Brazed Blade With Side Protection		Size: 115-400mm Arbor: 22.23mm	10pcs


Small Blades

Category	Code	Picture	Remarks	MOQ
Marble Ceramic, Porcelain Dekton	M1 CJ Continuous Rim With J-Slot Core		Size: 105-350mm Segment: 8/10mm Arbor: 22.23mm	10pcs
	M2 SU Segmentged Key Slot		Size: 115-250mm Segment: 10mm Arbor: 22.23-20-15.8mm Flange: Available	10pcs
	M3 TX Ultra Thin X Rim		Size: 75-350mm Segment: 8/10/12mm Arbor: 22.23-20-15.8mm Flange: Available	10pcs
	M4 TX-R Ultra Thin X Rim With Self Flange		Size: 75-350mm Segment: 8/10/12mm Arbor: 22.23-20-15.8mm Self Flange	10pcs
	M5 TT Ultra Thin Continuous Turbo Rim		Size: 105-350mm Segment: 8/10mm Arbor: 22.23-20-15.8mm Flange: Available	10pcs
	M6 VA Continuous VA Rim		New Product Size: 125mm Segment: 10mm Arbor: 22.23-20-15.8mm Flange: Available	10pcs
	M7 AA-R Continuous AA RimWith Self Flange		New Product Size: 125mm Segment: 10mm Arbor: 22.23-20-15.8mm Flange: Available	10pcs

Small Blades

Category	Code	Picture	Remarks	MOQ
Marble Ceramic, Porcelain Dekton	M8 LC Continuous Rim With Laser Cut		Size: 100-350mm Segment: 8/10mm Arbor: 22.23mm *Laser cut slot can be customized	10pcs
	M9 CW Continuous Rim With Wet Cutting		Size: 105-350mm Segment: 8/10mm Arbor: 22.23-20-15.8mm Flange: Available	10pcs
Electroplated Blades	EL1 MTX Both Side Electroplated Diamond Blade With Flange		Size: 105-230mm Flange: M14 or 5/8"-11	10pcs
	EL2 Segmented Electroplated Blade		Size: 105-230mm Arbor: 22.23mm Flange: Available	10pcs
Tuck Point	Tuck Point		Size: 105-230mm Segment: 6.35/9.35*10mm	5pcs
Crack Chaser	Crack Chaser		Size: 105-230mm Segment: 6.35/9.35*10mm	5pcs


Core Bits

Category	Code	Picture	Remarks	MOQ
Core Bits Granite	WCG Wet Core Bits		Silver Weld Wet Szie: 6-110mm Thread: M14 or 5/8"-11	10pcs
	DCB Dry Core Bits With Turbo Segment and Vacuum Brazed Side Protection		Laser Weld Dry Size: 6-100mm Thread: M14 or 5/8"-11	10pcs
	WGM Wet Granite/Marble Core Bits		Sintered Wet Szie: 6-100mm Thread: M14 or 5/8"-11 or 1/2" Gas or Shank	10pcs
	VBC Vacuum Brazed Dry Core Bits		Vacuum Brazed Dry Szie: 6-100mm Thread: M14 or 5/8"-11 or 1/2" Gas or Shank	10pcs
	BGP Thin Wall General Purpose Wet Core Bits		Sintered Wet Szie: 6-100mm Thread: M14 or 5/8"-11 or 1/2" Gas or Shank	10pcs
	BTC Thin Wall Ceramic Wet Core Bits		Sintered Wet Szie: 6-100mm Thread: M14 or 5/8"-11 or 1/2" Gas or Shank	10pcs
	CPZ Center Positon Drill		Sintered Wet Szie: 6-100mm Thread: M14 or 5/8"-11 or 1/2" Gas or Shank	10pcs

Core Bits

Category	Code	Picture	Remarks	MOQ
Core Bits Marble, Ceramic	WMC Wet Marble/Ceramic Core Bits		Sintered Wet Szie: 6-100mm Thread: M14 or 5/8"-11 or 1/2" Gas or Shank	10pcs
	ELC Electroplated Core Bits		Electroplated Dry Szie: 6-100mm Thread: M14 or 5/8"-11 or 1/2" Gas or Shank	10pcs

Cup Wheels

Category	Code	Picture	Remarks	MOQ
Cup Wheels	SIG Single Row		Hot Press Cup Wheel Size: 100/115/125/180mm Grit: Coarse Thread: 22.23mm	5pcs
	D27 Double Row		Hot Press Cup Wheel Size: 100-230mm Grit: Coarse Thread: M14 or 5/8"-11 or 22.23mm	5pcs
	C142 Spin		Hot Press Cup Wheel Size: 100-230mm Grit: Coarse Thread: 22.23mm	5pcs
	ARC Continuous Rim		Hot Press Cup Wheel Size: 100mm Grit: Coarse Thread: M14 or 5/8"-11	5pcs
	CRS Continuous Rim With Snail Lock		Hot Press Cup Wheel Size: 100/125mm Grit: Coarse Thread: Snail Lock	5pcs
	TC20 Steel Turbo		Hot Press Cup Wheel Size: 40-180mm Grit: Coarse Thread: M14 or 5/8"-11	5pcs
	DLT Double Layer		Hot Press Cup Wheel Size: 40-180mm Grit: Coarse Thread: M14 or 5/8"-11	5pcs

Cup Wheels

Category	Code	Picture	Remarks	MOQ
Cup Wheels	T26 T Segments		Hot Press Cup Wheel Size: 100/125/180mm Grit: Coarse Thread: M14 or 5/8"-11	5pcs
	AL30 Aluminium Turbo		Hot Press Cup Wheel Size: 100/125/150/180mm Grit: Coarse, Medium, Fine Thread: M14 or 5/8"-11	5pcs
	PUZ Puzzle Cup Wheels		Hot Press Cup Wheel Size: 125mm Grit: Coarse Thread: 22.23mm	200pcs
	FTS F Type Segment Cup Wheels		Hot Press Cup Wheel Size: 125mm Grit: Coarse Thread: 22.23mm	200pcs
	PCD Cup Wheels		PCD Cup Wheels Size: 100/125mm Thread: M14 or 5/8"-11 or 22.23mm	5pcs
	LCP-1 Cold Press		Cold Press Cup Wheels Size: 100mm Grit: Coarse Thread: 22.23	5pcs
	LCP-2 Cold Press		Cold Press Cup Wheels Size: 100mm Grit: Coarse Thread: 22.23	5pcs




Cup Wheels

Category	Code	Picture	Remarks	MOQ
Cup Wheels	LCP-3 Cold Press		Cold Press Cup Wheels Size: 100mm Grit: Coarse Thread: 22.23	5pcs
	LCP-4 Cold Press		Cold Press Cup Wheels Size: 100mm Grit: Coarse Thread: 22.23	5pcs
	LCP-5 Cold Press		Cold Press Cup Wheels Size: 100mm Grit: Coarse Thread: 22.23	5pcs
	LCP-6 Cold Press		Cold Press Cup Wheels Size: 100mm Grit: Coarse Thread: 22.23	5pcs
	LCP-7 Cold Press		Cold Press Cup Wheels Size: 100mm Grit: Coarse Thread: 22.23	5pcs

Cup Wheels

Category	Code	Picture	Remarks	MOQ
Shaping Wheels	RC22 Resin Filled Shaping Wheels		Resin Filled Shaping Wheel Size: 100/125mm Grit: Coarse, Medium, Fine Thread: M14 or 5/8"-11	5pcs
Shaping Wheels	RX23 Resin Filled Shaping Wheels		Resin Filled Shaping Wheel Size: 100/125mm Grit: Coarse, Medium, Fine Thread: M14 or 5/8"-11	5pcs
Flap Disc	BYL Diamond Flap Disc		Size: 100/115mm Grit: 60/120/200/400 Thread: 22.23mm	5pcs

Chamfering wheel

Category	Code	Picture	Remarks	MOQ
Chamfering wheel	SN135 Spiral Blue Chamfering Wheels		Size: 100/125mm Thickness: 6mm Grit: #50,#100,#200,#400, #800,#1500,#3000 Thread: Snail Lock	10pcs
	SN136 Spiral Yellow Chamfering Wheels		Size: 100/125/150mm Thickness: 6mm Grit: #50,#100,#200,#400, #800,#1500,#3000 Thread: Snail Lock	10pcs
	SN137 Sponge Chamfering Wheels		Size: 100/125/150mm Thickness: 16mm Grit: #150,#300,#500,#1000, #2000,#3000, #6000,#10000 Thread: Snail Lock	10pcs
	SN141 Polygon Chamfering Wheels		Size: 100/125/150mm Thickness: 6mm Grit: #50,#100,#200,#400, #800,#1500,#3000 Thread: Snail Lock	10pcs



Finger Bits and Drum Wheels

Category	Code	Picture	Remarks	MOQ
Finger Bits				
Finger Bits	FC18 Finger Bits With Curved Segments		Diameter: 25mm Length: 35/40/50mm Thread: 1/2" Gas	10个
	F22 Vacuum Brazed Finger Bits		Diameter: 25mm Length: 35/40/50mm Thread: 1/2" Gas	10个
Drum Wheels				
Drum Wheels	Z17 Zero Tolerance Wheels		Diameter: 40mm Length: 50/75/100mm Thread: 1/2" Gas	5个
	Silicon Carbide Stones		Diameter: 50mm Length: 100/115/125mm Grit: #16,#24,#26,#40, #60,#80,#100,#120 Thread: M14 or 5/8"-11	10个

Antique Brushes

Category	Code	Picture	Remarks	MOQ
Silicon Carbide Antique Brushes	Round Silicon Carbide		Size: 100/125mm Grit: #36,#46,#60,#80, #120,#180,#240,#320,#500	10pcs
	Frankfurt Silicon Carbide		Size: 104x100/80x30mm Grit: #36,#46,#60,#80, #120,#180,#240,#320,#500	10pcs
	Fickert Silicon Carbide		Size: L140mm Grit: #36,#46,#60,#80, #120,#180,#240,#320,#500	10pcs
Diamond Antique Brushes	Round Diamond		Size: 100/125mm Grit: #36,#46,#60,#80, #120,#180,#240,#320,#500	5pcs
Diamond Antique Brushes	Frankfurt Diamond		Size: 104x100/80x30mm Grit: #36,#46,#60,#80, #120,#180,#240,#320,#500	5pcs
	Fickert Diamond		Size: L140mm Grit: #36,#46,#60,#80, #120,#180,#240,#320,#500	5pcs

Bush Hammer & Felt & Wire Saw

Category	Code	Picture	Remarks	MOQ
Bush Hammer	BH Bush Hammer Plate For Angle Grinder		Size: 125/150/200/300 Thread: M14 or 5/8"-11	2pc
Wool Felt Wheels	FW Wool Felt Wheels		Diameter: 100/125mm Thickness: 10/15/20/30/40mm Edge: Straight or Curve Thread: M14 or 5/8"-11	10pcs
Diamond Wire Saw	Rubber Wire Saw For Quary	1.Diamond Wire Saw For Quary: We recommend rubber which can protect the wire saw rope very well and increase the wire's strength. The rubber has good temperature resistance, and it can be used when water is not enough. Having flexibility can reduce the cut to one-side problem. 	See Details Below	
	Plastic Wire For Block Dressing	2.Diamond Wire Saw For Block Dressing: We recommend plastic wire, it can be used to dress marble grains. It can cut accurately with small later spaces. It can cut the block with the thickness of 2.5M. 	See Details Below	
	Plastic Wire For Profiling	3.Diamond Wire Saw For Profiling: We recommend plastic wire for shaping operations provides a large range of possibilities. It makes smooth surface, and accurate lines with small later spaces. Columns and domes for the building surfaces can be produced in much more economic way. 	See Details Below	
	10.5/11.5mm Rubber and Spring Wire For Concrete Cutting	4.Diamond Wire Saw For Reinforce Concrete Cutting: We recommend 10.5/11.5mm Rubber and Spring wire. The wires are widely used in the reinforced concrete with more than 9% steel inside. Used in the building constructions, cutting for houses, bridges, cement pipes and under water buildings. 	See Details Below	

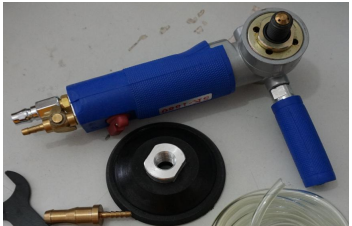
Bush Hammer & Felt & Wire Saw

Category	Code	Picture	Remarks	MOQ
Diamond Wire Saw	Multi-Wire For Slab Cutting	Diamond Multi-Wire Saw For Slab Cutting: Diamond multi cutting wire saws are suitable for cutting the different kinds of large granite slabs. Research Institute group can produce 1 to 4000m, 500 to 4000 square meters of slabs of 2cm thickness. The multi wire can produce 5000 to 6000 square meters of slabs cut at any thickness between 1" to 60mm. 	See Details Below	

Application	1.For Stone Quarry,Block Squaring&Chamfering,Profiling Cutting 2.For Cutting Reinforce Concrete
Diameter Of Wire Saw	10.5mm, (11.5mm)
Technology	Sintered, (Electroplated,Vaccum Brazed)
Coating Fix Injection	Plastic,Rubber,Spring,Rubber+Spring,Plastic+Spring
Beads/Meter	40/37/33/28/26pcs
Attention	1. Checking the saw regularly and adjust timely. 2.Checking the pearl abraide regularly,Avoid the eccentric wear 3. Checking the joint regularly and adjust timely. 4. The tension of ropes is 250-300kg(Φ4-5mm ropes) 5. Water supply is around 15-25L/min
Feature	1.Very less breakage ratio when using therefore increase the working lifetime. 2.Automatic production ensures stable quality performance. 3.Safe, high efficiency and environment protecting.

Diameter(mm)	Applications	Coating	Bead/m	Cutting Speed(m2/h)	Wire Life(m2/m)
Φ11.5/Φ10.5	Reinforced concrete	rubber+spring	40	0.5-5	0.5-8
Φ11.5/Φ11.0	Granite mine/quarry	rubber/rubber+spring	40	2-12	7-22
Φ11.5/Φ11.0/Φ10.5	Marble mine/quarry	spring/spring+plastic	28-40	4-20	15-50
Φ11.0/10.5	Granite & marble block	plastic/rubber	37/40	6-30	7-50
Φ8.8/Φ8.5	Granite&marble profiling	plastic/rubber	33/37/40	7-30	7-40
Φ7.2/Φ8.5	Granite slab	plastic	37	0.5-1.6	6-15

Air and Power Tools

Category	Code	Picture	Remarks	MOQ
Air Polishers	APTW Taiwan Made Air Polisher		Thread: M14 or 5/8"-11	1pc
	APEL ELA Air Polisher		Thread: M14 or 5/8"-11	1pc
	APRO Rear Exhaust Air Polishing Machine		Thread: M14 or 5/8"-11	1pc
	APBE Blue Air Polishing Machine		Thread: M14 or 5/8"-11	1pc
Power Tools	PTCH Power Circle Saw Machine		Blade Size: 100-125mm	1pc
	GRW Electric Wet Polisher		Thread: M14 or 5/8"-11	1pc
	Portable Edge Machine		Thread: 8/10mm	1pc



烟台天一制锯有限公司
Yantai Diany Saw Mfg. Co., Ltd.

QX Manual Cutting Machine For Tile and Stone

QX 系列 SERIES

专业设计，匠心制造，配件精良。
Professional design, Ingenuity manufacturing,
Superior accessories.



大功率切割主机
High power motor



专业切割片
Professional cutting saw blade



开槽
Slotting



磨边边
Grinding edge

瓷砖石材切割机主要技术参数 TECHNICAL PARAMETERS OF STONE & CERAMIC TILE CUTTING MACHINE



型号	QX-800	QX-1000/1200	QXZ-1600/1800
切割主机/Motor	220V 50Hz 1550W 12000 r / min	220V 50Hz 1550W 12000 r / min	220V 50Hz 1550W 12000 r / min
最大锯片尺寸/Max size of saw blade	Φ120 mm	Φ120 mm	Φ120 mm
最大切割深度/Max cutting depth 90° /45°	30 mm / 20 mm	30 mm / 20 mm	30 mm / 20 mm
最大切割长度/Max cutting length	800 mm	1000/1200 mm	1600/1800 mm
工作台尺寸/Size of table	800 X 500 mm	1000/1200 X 500 mm	1600/1800 X 500 mm
冷却水泵/Cooling water pump	DC 24 V 30 W 9m 6L / min	DC 24 V 30 W 9m 6L / min	DC 24 V 30 W 9m 6L / min
包装尺寸/Packing size(mm)	1410 x 560 x 550	1700 x 540 x 490 / 1900 x 540 x 490	2280 x 590 x 570 / 2480 x 590 x 570
净重/毛重/N.W/G.W	49/68Kg	51/71Kg 56/79Kg	62/85 Kg 66/90 Kg

Price:	QX-800: \$487	QX-1000: \$529 QX-1200: \$593	QXZ-1600: \$953 QXZ-1800: \$1,017
--------	---------------	----------------------------------	--------------------------------------



烟台天一制锯有限公司
Yantai Dianny Saw Mfg. Co., Ltd.

QX-ZD Automatic Cutting Machine For Tile and Stone



对角切割
Diagonal cutting



45° 角切割
45° Angle cutting



45° 坡角切割
45° Bevel cutting

QX-ZD 系列 SERIES

设计简洁，构造精巧，动力强劲，切割精准，是各种瓷砖石材的切割专家。

The cutting machine with terse design, exquisite structure, strong power and precise cutting, which is cutting expert to different kinds of ceramic tile and stone.



瓷砖石材全自动切割机主要技术参数 TECHNICAL PARAMETERS OF STONE & CERAMIC TILE CUTTING MACHINE



型 号	QX-ZD-800	QX-ZD-1000/1200	QXZ-ZD-1600/1800
切割主机/Motor	220V 50Hz 1550W 12000 r/min	220V 50Hz 1550W 12000 r/min	220V 50Hz 1550W 12000 r/min
最大锯片尺寸/Max size of saw blade	Φ120 mm	Φ120 mm	Φ120 mm
最大切割深度/Max cutting depth 90°/45°	30 mm / 20 mm	30 mm / 20 mm	30 mm / 20 mm
最大切割长度/Max cutting length	800 mm	1000/1200 mm	1600/1800 mm
工作台尺寸/Size of table	800 X 500 mm	1000/1200 X 500 mm	1600/1800 X 500 mm
冷却水泵/Cooling water pump	DC 24 V 30 W 9m 6L/min	DC 24 V 30 W 9m 6L/min	DC 24 V 30 W 9m 6L/min
包装尺寸/Packing size(mm)	1410 x 560 x 550	1700 x 540 x 490 / 1900 x 540 x 490	2280 x 590 x 570 / 2480 x 590 x 570
净重/毛重/N.W/G.W	56/73 Kg	58/78 Kg 63/86 Kg	73/96 Kg 79/101 Kg

Price:	QX-ZD-800: \$741	QX-ZD-1000: \$784 QX-ZD-1200: \$847	QXZ-ZD-1000: \$1,229 QXZ-ZD-1200: \$1,314
--------	------------------	--	--



烟台天一制锯有限公司
Yantai Diany Saw Mfg. Co., Ltd.

QZ **Manual** Cutting Machine For Tile and Stone

QZ 系列 SERIES

"W" 形折叠脚架设计。方便装
运移动。全铝合金设计。轻便
耐用易清洁。

The W type folding tripod is designed for
easy movement, all aluminium alloy
structure design make it portable,
durable and easy to clean.



石材切割机
Stone cutting machine



切割尺寸快速调节
Fast adjustment of cutting size



45° 倾斜
45° lean



万向靠板
Universal leaning board

瓷砖石材切割机主要技术参数 TECHNICAL PARAMETERS OF STONE & CERAMIC TILE CUTTING MACHINE



型 号	QZ-800	QZ-1000/1200	QZ-1600/1800
切割主机/Motor	220V 50Hz 1500W 5000 r / min	220V 50Hz 1500W 5000 r / min	220V 50Hz 1500W 5000 r / min
最大锯片尺寸/Max size of saw blade	Φ180 mm	Φ180 mm	Φ180 mm
最大切割深度/Max cutting depth 90° /45°	50 mm / 40 mm	50 mm / 40 mm	50 mm / 40 mm
最大切割长度/Max cutting length	800 mm	1000/1200 mm	1600/1800 mm
工作台尺寸/Size of table	800 X 500 mm	1000/1200 X 500 mm	1600/1800 X 500 mm
冷却水泵/Cooling water pump	DC 24 V 36 W 10m 6L / min	DC 24 V 36 W 10m 6L / min	DC 24 V 36 W 10m 6L / min
包装尺寸/Packing size(mm)	1410 x 560 x 650	1700 x 540 x 590 / 1900 x 540 x 590	2280 x 590 x 670 / 2480 x 590 x 670
净重/毛重/N.W/G.W	51/68 Kg	55/74 Kg 59/81 Kg	66/92 Kg 70/96Kg

Price:	QZ-800: \$763	QZ-1000: \$816 QZ-1200: \$890	QZ-1600: \$1,017 QZ-1800: \$1,102
--------	---------------	----------------------------------	--------------------------------------



烟台天一制锯有限公司
Yantai Diany Saw Mfg. Co., Ltd.

QZ-ZD Automatic Cutting Machine For Tile and Stone



45° 斜切切割
45° Slanting cutting



45° 对角切
45° Diagonal cutting



菱形切割
Diamond Cutting

QZ-ZD 系列 SERIES

具有多功能性，可进行对角、倒角、菱形切割等各种切割方法。

The cutting machine is versatility with different cutting type like diagonal, chamfer and diamond cutting etc.



瓷砖石材全自动切割机主要技术参数 TECHNICAL PARAMETERS OF STONE & CERAMIC TILE CUTTING MACHINE



型号	QZ-ZD-800	QZ-ZD-1000/1200	QZ-ZD-1600/1800
切割主机/Motor	220V 50Hz 1500W 5000 r / min	220V 50Hz 1500W 5000 r / min	220V 50Hz 1500W 5000 r / min
最大锯片尺寸/Max size of saw blade	Φ180 mm	Φ180 mm	Φ180 mm
最大切割深度/Max cutting depth 90°/45°	50 mm / 40 mm	50 mm / 40 mm	50 mm / 40 mm
最大切割长度/Max cutting length	800 mm	1000/1200 mm	1600/1800 mm
工作台尺寸/Size of table	800 X 500 mm	1000/1200 X 500 mm	1600/1800 X 500 mm
冷却水泵/Cooling water pump	DC 24 V 36 W 10m 6L / min	DC 24 V 36 W 10m 6L / min	DC 24 V 36 W 10m 6L / min
包装尺寸/Packing size(mm)	1410 x 560 x 650	1700 x 540 x 590 / 1900 x 540 x 590	2280 x 590 x 670 / 2480 x 590 x 670
净重/毛重/N.W/G.W	58/75 Kg	62/81 Kg 66/88 Kg	77/103 Kg 82/108 Kg

Price:	QZ-ZD-800: \$1,017	QZ-ZD-1000: \$1,059 QZ-ZD-1200: \$1,123	QZ-ZD-1600: \$1,314 QZ-ZD-1800: \$1,398
--------	--------------------	--	--

Yantai Diany Saw Mfg. Co., Ltd

烟台天一制锯有限公司



Email:dianysaw@126.com

Cell:18605459790 13791150200

Tel:+86-535-6015341

dianysaw.en.alibaba.com



H 工地轻便切割机 Stone Cutting Machine



本款机器专为各类石材，陶瓷及砖类提供专业的切割效果而设计。该机器设计简单合理，自动带水环保作业，安装及操作简便且不受任何场地的限制。多种切割长度和深度可供用户选择，左右两侧的辅助工作台同时增强了机器的扩展性能。铝合金材质机头及轴承导轨保证了机器的轻便性能和切割精度，不锈钢台面和加厚的机身大大提高了机器的耐久度和使用寿命。广泛的切割用途配以 45° 角切割效果，使得这款机器成为中小型切割需求中的最佳解决方案。

For people who work with stone, brick, large tiles or blocks, it goes without saying that precision is crucial to the end result. But the efficiency of the machine should never compromise the need for good ergonomics and a reasonable workload. Put simply, the stone or tile you cut must fit perfectly, just as the machine and the blade you use must fit your work situation perfectly.

型号及主要参数 Model and Parameter

	H800M	H800L	H200M	H200L
功率 POWER:	2.2kw/3hp	2.2kw/3hp	2.2kw/3hp	2.2kw/3hp
电压、频率 V/Hz:	220/380 50/60	220/380 50/60	240/380 50/60	240/380 50/60
锯片外径 BLADE SIZE:	250~300mm	250~400mm	250~300mm	250~400mm
锯片内孔 BORE SIZE:	25.4/50mm	25.4/50mm	25.4/50mm	25.4/50mm
转速 R.P.M OF BLADE:	2800-3400	2800-3400	2800-3400	2800-3400
切割长度 CUTTING LENGTH:	800mm	800mm	1200mm	1200mm
切割深度 CUTTING DEPTH:	70mm	125mm	70mm	125mm
倒角 BEVEL CUT:	0-45°	0-45°	0-45°	0-45°
重量 WEIGHT:	130kg/160kg	135kg/165kg	150kg/180kg	155kg/185kg
包装尺寸 Packing Size:	1330x810x360mm	1330x810x360mm	1730x810x360mm	1730x810x360mm
	540x480x300mm	540x480x300mm	540x480x300mm	540x480x300mm

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.



W 手摇式轻便切割机 Stone Cutting Machine



本款机器专为各类石材，陶瓷及砖类提供专业的切割效果而设计。

该机器设计简单合理，自动带水环保作业，安装及操作简便且不受任何场地的限制。多种切割长度和深度可供用户选择，左右两侧的辅助工作台同时增强了机器的扩展性能。铝合金材质机头及轴承导轨保证了机器的轻便性能和切割精度，不锈钢台面和加厚的机身大大提高了机器的耐久度和使用寿命。广泛的切割用途配以 45° 角切割效果，使得这款机器成为中小型切割需求中的最佳解决方案。

For people who work with stone, brick, large tiles or blocks, it goes without saying that precision is crucial to the end result. But the efficiency of the machine should never compromise the need for good ergonomics and a reasonable workload. Put simply, the stone or tile you cut must fit perfectly, just as the machine and the blade you use must fit your work situation perfectly.

型号及主要参数 Model and Parameter

	W200	W600	W800	W2000
功率 POWER:	2.2kw/3hp	2.2kw/3hp	2.2kw/3hp	2.2kw/3hp
电压、功率 V/Hz:	240/380 50/60	240/380 50/60	240/380 50/60	240/380 50/60
锯片直径 BLADE SIZE:	250~300mm	250~300mm	250~300mm	250~300mm
锯片内孔 BORE SIZE:	25.4/50mm	25.4/50mm	25.4/50mm	25.4/50mm
转速 R.P.M OF BLADE:	2800-3400	2800-3400	2800-3400	2800-3400
切割长度 CUTTING LENGTH:	1200mm	1600mm	1800mm	2000mm
切割深度 CUTTING DEPTH:	70mm	70mm	70mm	70mm
倒角 BEVEL CUT:	0-45°	0-45°	0-45°	0-45°
重量 WEIGHT:	170kg/240kg	220kg/260kg	250kg/300kg	280kg/330kg
包装尺寸 Packing Size:	1850x830x900mm	2300x830x900mm	2500x830x900mm	2650x830x900mm

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.

W650 砖石切割机 Stone Cutting Machine



本机采用大锯片设计，用于切割尺寸较大的路边石、空心砖、水泥块等建筑材料。机身设计稳固，主要部件采用进口产品，寿命长，精度高。手摇驱动切割，切割均匀、省力。高强度透明防护帘有效防护进溅的同时不影响操作视野。本机采用自动水循环系统，方便使用。

Robust, accurate, versatile and economical. Designed mainly for cutting blocks, hollow brick and cutstone. Extremely accurate with head sliding by means of linear ball bearings on two chrome-plated and ground bars. Cutting control through belt drive by a handwheel. It is equipped with a submersed pump inside the base for disc cooling. Vertical motion of the head by means of handwheel for stable and fast control. Inclined head for 45° cuts.



型号及主要参数 Model and Parameter

	W600S	W600L	W650S	W650L
功率 Power:	4kw	4kw	4kw	4kw
电压、频率 V/Hz:	380v/50Hz	380v/50Hz	380v/50Hz	380v/50Hz
切长 Cutting Length:	350mm	750mm	300mm	700mm
切深 Cutting Depth:	205mm	205mm	230mm	230mm
锯片直径 Blade Size:	600mm	600mm	650mm	650mm
锯片转速 Blade Speed:	1440	1440	1440	1440
重量 Weight:	170/220kgs	220/280kgs	180/230kgs	230/290kgs
包装尺寸 Packing Size:	1500x900x1100mm	1900x900x1100mm	1500x900x1100mm	1900x900x1100mm

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.



E 轻便切割机自动型 Stone Cutting Machine



本款机器专为各类石材、陶瓷及砖类提供专业的切割效果而设计，电动切割，无需手拉。该机器设计简单合理，自动带水环作业，安装及操作简便且不受任何场地的限制。多种切割长度和深度可供用户选择，左右两侧的辅助工作台同时增强了机器的扩展性能。铝合金材质机头及轴承导轨保证了机器的轻便性能和切割精度，不锈钢台面和加厚的机身大大提高了机器的耐久度和使用寿命。广泛的切割用途配以 45° 角切割效果，使得这款机器成为中小型切割需求中的最佳解决方案。

This type of machine designed with auto-feeding. For people who work with stone, brick, large tiles or blocks, it goes without saying that precision is crucial to the end result. But the efficiency of the machine should never compromise the need for good ergonomics and a reasonable workload. Put simply, the stone or tile you cut must fit perfectly, just as the machine and the blade you use must fit your work situation perfectly.

型号及主要参数 Model and Parameter

	E200	E600	E800	E2000
功率 POWER:	2.2kw/3hp	2.2kw/3hp	2.2kw/3hp	2.2kw/3hp
电压、频率 V/Hz:	240/380 50/60	240/380 50/60	240/380 50/60	240/380 50/60
锯片直径 BLADE SIZE:	250~300mm	250~300mm	250~300mm	250~300mm
锯片内孔 BORE SIZE:	25.4/50mm	25.4/50mm	25.4/50mm	25.4/50mm
锯片转速 R.P.M:	2800-3400	2800-3400	2800-3400	2800-3400
切割长度 CUTTING LENGTH:	1200mm	1600mm	1800mm	2000mm
切割深度 CUTTING DEPTH:	70mm	70mm	70mm	70mm
倒角 BEVEL CUT:	0-45°	0-45°	0-45°	0-45°
重量 WEIGHT:	190kg/260kg	240kg/300kg	270kg/320kg	300kg/350kg
包装尺寸 Packing Size:	1950x900x900mm	2400x900x900mm	2600x900x900mm	2750x900x900mm

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.

V 开槽机 Side Slot Cutting Machine



本款产品专用于工地现场开干挂侧边槽，设计小巧，移动方便。
自带水箱，水泵。可以局部开槽，也可侧边通长开槽。

This machine is specially designed for slotting the dry hanging stone. With compact size and light weight, the machine can be moved easily to cut slot partially or fully for the building site.

型号及主要参数 Model and Parameter

功率 Power:	2.2kw
电压、频率 Voltage/Frequency:	240v, 50hz
最大开槽长度 Slotting length:	700mm
最大开槽深度 Slotting depth:	50mm
锯片直径 Dia. of blade:	250mm
锯片转速 RPM of blade:	2900r/min
锯片内孔 Bore size:	25.4mm/ 50mm
净重 Net weight:	110kg
包装尺寸 Packing size:	1670x820x780mm





大理石锯片

- 优质大理石锯片
- 1、大理石专用锯片、湿切
 - 2、切割效果精准、寿命长
 - 3、各种尺寸 300mm/350mm/400mm，中心孔 25.4mm 或 50mm
 - 4、适用于各种切割机



大理石锯片

- 优质大理石锯片
- 1、通用型大理石锯片、湿切
 - 2、切割效果精准、寿命长
 - 3、各种尺寸 300mm/350mm/400mm，中心孔 25.4mm 或 50mm
 - 4、适用于各种切割机



陶瓷锯片

- 优质陶瓷锯片
- 1、适用于切割各种陶瓷制品、瓷砖、地砖、
 - 2、切面光滑、平整、无崩边
 - 3、切割效果精准、寿命长
 - 4、各种尺寸 250/300mm/350mm，中心孔 25.4mm 或 50mm
 - 4、适用于各种切割机



花岗石锯片

- 优质花岗石锯片
- 1、通用型开口锯片，适用于切割花岗石或人造石。
 - 2、切割效果精准、寿命长。
 - 3、各种尺寸 300mm/350mm/400mm，中心孔 25.4mm 或 50mm
 - 4、适用于各种切割机

A 瓷砖、砖石切割机 Tile / Masonry Saw



该机器适用于小规格石材，陶瓷及砖类的切割。

稳固的结构和合理的设计在便于拆卸的同时保证了机器的切割精度。600x600的切割尺寸，45°倾角，最大125mm的切割深度，环保带水作业及广泛的用途赋予了该机器极好的功能性和适用性，因此特别适用于建筑工程和施工现场。

Designed to cut small-sized stone, brick, or tile, this machine can perform precise cutting with stable frame and powerful motor. This saw is adapt to all kinds of home and project purpose.



型号及主要参数 Model and Parameter

A350	A400
功率 Motor Power:2.2kw	功率 Motor Power:2.2kw
电压、频率 V/Hz:240v,380v/50,60Hz	电压、频率 V/Hz:240v,380v/50,60Hz
切割长度 Max Cutting Length:600mm	切割长度 Max Cutting Length:600mm
切割深度 Max Cutting Depth:110mm	切割深度 Max Cutting Depth:125mm
锯片直径 Blade Size:350mm	锯片直径 Blade Size:400mm
锯片转速 R.P.M of blade:2900-3400	锯片转速 R.P.M of blade:2900-3400
锯片内孔 Bore size:1 inch or 50mm	锯片内孔 Bore size:1 inch or 50mm
净重 Net weight:80kgs	净重 Net weight:85kgs
毛重 Gross weight:105kgs	毛重 Gross weight:110kgs
包装尺寸 Packing Size:1350x700x700mm	包装尺寸 Packing Size:1320x680x570mm

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.

A600 砖石、加气块切割机 Tile / Masonry Saw



OSC-A600 型石材切割机广泛应用于建筑、装饰等行业，提供厚砖石的专业切割，也可用于空心砖、厚砖块、混凝土块等普遍使用的建筑材料的切割；最大切深 210mm，循环水泵，带水环保作业。

产品特点：广泛应用于建筑、装饰等行业；提供厚砖石的专业切割，也可用于厚砖块、混凝土块等普遍使用的建筑材料的切割；防滑胶垫平台，保证石材平稳切割；4Kw 电机，马力澎湃，操控自如，配有 380V 防水开关；带水环保作业，冷却水内循环式，微型水泵放置于工作台面水槽内，最大限度保障施工人员健康；操作简单，维护轻松，使用稳定。

The model OSC-A600 has a wide range of cutting purpose with perfect performance. With cutting depth 210mm, this model can be used to cut general construction material like hollow brick, rock, concrete block and road stone etc. Water pump is equipped for wet cutting against dust.

Characteristic: Widely purpose for construction and decoration; Generally used for different thick materials; Rubber anti-skidding table to ensure stable cutting; Powerful 4kw motor with 380v anti-water switch; Wet cutting to reduce dust pollution.

Easy operation and maintenance.

型号及主要参数 Model and Parameter

A600
功率 Motor Power: 4kw
电压、Voltage: 380V
锯片尺寸 Blade Size: 600mm
锯片内孔 Bore Size: 50mm
锯片转速 R.P.M of Blade: 1440
最大切长 Max. Cutting Length:590mm
最大切深 Max. Cutting Depth:210mm
净重 Net Weight: 95kg
毛重 Gross Weight: 120kg

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.



B 瓷砖、砖石切割机 Tile / Masonry Saw



该机器适用于小规格石材，陶瓷及砖类的切割。稳固的结构合理的设计在便于拆卸的同时保证了机器的切割精度。45° 倾角，最大 110mm 的切割深度，环保带水作业及广泛的用途赋予了该机器极好的功能性和适用性，因此特别适用于建筑工程和施工现场。

Designed to cut small-sized stone, brick, or tile, this machine can perform precise cutting with powerful motor. With good adaptability, low noise, and water cooling, this saw is good choice for home decor and project use.



型号及主要参数 Model and Parameter

功率 Motor Power:	2.2kw
电压、频率 V/Hz:	240v, 380v/50, 60Hz
切割长度 Max Cutting Length:	500mm
切割深度 Max Cutting Depth:	110mm
锯片直径 Blade Size:	350mm
锯片转速 R.P.M of blade:	2900-3400
锯片内孔 Bore size:	1 inch or 50mm
净重 Net weight:	75kgs
毛重 Gross weight:	95kgs
包装尺寸 Packing Size:	1050x660x700mm

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.

S 切割机自动型 Stone Cutting Machine



STORM3000 系列切割机，是专为大尺寸高精度切割而设计，切割精度极高，可以直切、倒角及磨简单边。本机实现了超广调速范围，可实现超慢速切割。

STORM3000 series cutting machine is designed specially to cut big size stone with extremely high precision and multi-function like straight cutting, beveling, and simple edge polishing. The cutting speed of this machine can be adjusted in wide range while also super low.

型号及主要参数 Model and Parameter

	S2000	S2500	S3000
功率 POWER:	3.7kw/5hp	3.7kw/5hp	3.7kw/5hp
电压、频率 V/Hz:	220/380 50hz	220/380 50hz	220/380 50hz
锯片直径 BLADE SIZE:	300-350mm	300-350mm	300-350mm
锯片内孔 BORE SIZE:	25.4/50mm	25.4/50mm	25.4/50mm
锯片转速 R.P.M:	2800	2800	2800
切割长度 CUTTING LENGTH:	2000mm	2500mm	3000mm
切割深度 CUTTING DEPTH:	70mm	70mm	70mm
倒角 BEVEL CUT:	0-45°	0-45°	0-45°
重量 WEIGHT:	470kg/690kg	530kg/750kg	600kg/830kg
包装尺寸 Packing Size:	2950x1040x1580mm	3450x1040x1580mm	3950x1040x1580mm

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.

SP 切割机自动型 Stone Cutting Machine



Storm3000-plus 系列多功能轻型切割机是在 storm3000 基础上升级的多功能机型，相比 INNOVA 系列多功能切割机，结构更加稳固，切割精度大幅提高。该机集切割，倒角，开槽，磨边，钻孔等多种功能于一身。结构紧凑，占地面积小，性价比极高。广泛应用于石材加工厂，厨房台面制作，小型加工门店，装修现场等各种场合。

STORM3000-PLUS Series Multi-function Cutting Machine is upgraded multi-function model based on STORM3000. It is with more stable structure compared to INNOVA Series, cutting precision increased greatly. This machine combined cutting, chamfering, slotting, edge polishing, drilling and other functions in one. Compact structure, small area coverage, cost-effective. It is widely used in stone processing plants, kitchen countertops making, small processing store, decoration site and other occasions.

型号及主要参数 Model and Parameter



	SP2000	SP3000
功率 POWER:	3.7kw/5hp	3.7kw/5hp
电压、频率 V/Hz:	220/380 50hz	220/380 50hz
锯片直径 BLADE SIZE:	300-350mm	300-350mm
锯片内孔 BORE SIZE:	25.4/50mm	25.4/50mm
锯片转速 R.P.M:	2800	2800
切割长度 CUTTING LENGTH:	2000mm	3000mm
切割深度 CUTTING DEPTH:	70mm	70mm
倒角 BEVEL CUT:	0-90°	0-90°
重量 WEIGHT:	520kg/760kg	650kg/900kg
包装尺寸 Packing Size:	2950x1040x1900mm	3950x1040x1900mm

备注：此款机器标配自带水泵，锯片需单独购买。
Note: The machine includes water pump but without blade.



一机多用，切割、倒角、磨边、钻孔
With multi-function of cutting, chamfering, edge polishing and drilling.

Accessories

Category	Code	Picture	Remarks	MOQ
Backer Heads	BK40 Black Rubber Backer Heads		Connection: Velcro Thread: M14 or 5/8"-11	10pcs
	BK400 Flexible Black Rubber Backer Heads		Flexible Connection: Velcro Thread: M14 or 5/8"-11	10pcs
	BK136 Aluminium Rigid Backer Heads		Aluminium Connection: Velcro Thread: M14 or 5/8"-11	10pcs
	BK134 Aluminium Snail Lock Backer Heads		Aluminium Connection: Snail Lock Thread: M14 or 5/8"-11	10pcs
	BKA Sand Paper Backer Heads		Foam Connection: Velcro Thread: M14 or 5/8"-11	10pcs
	BKB Foam Sand Paper Back Heads		Rubber Thread: M14 or 5/8"-11	10pcs

Accessories

Category	Code	Picture	Remarks	MOQ
Safety Protection	Blue Aprons		Waterproof	10pcs
	Blue Sleeves		Waterproof	10 Pairs
	Rubber Sleeves		Waterproof	5 Pairs
	Gum Boots		Waterproof	1 Pair

Yantai Diany Saw Mfg. Co., Ltd.

dianysaw.en.alibaba.com

Visit Our Website To Find More